

- Floor & Wall Finishes
- Thermal & Moisture Protection
- Concrete Protection & Renewal

ELASTATEX 500

Premium Elastomeric Decking & Waterproofing System

Dex-O-Tex's Elastatex 500 is a solvent-free, fluid-applied, elastomeric waterproofing and surfacing system ideal for waterproofing balconies, walking decks and semi-level roof decks aboard ships.

The Elastatex 500 system consists of a unique moisture-cure aromatic urethane with broadcast rubber granules and a durable, aliphatic urethane polyurea blended elastomeric topcoat available in a broad range of attractive colors.

Elastatex 500 is turned up against buildings, walls, parapets, etc. to form an integral waterproof membrane.

Designed primarily as a waterproof system for deck surfaces, it is also used as a protective covering for renovating elevated concrete, including: cracked concrete, promenade decks, pool decks, etc.


Advantages

- Monolithic, including integral flashing
- Resilient and comfortable under foot
- Reduces sound transmission to adjacent areas
- Non-flammable during installation
- Environmentally safe
- Zero VOC — Exceeds all federal, state and agency VOC requirements

Elastatex 500 is designed for application over new and existing concrete, metal and plywood surfaces. It has excellent crack-bridging and low temperature flexibility characteristics, designed to protect concrete surfaces from spalling and scaling associated with freeze/thaw induced damage.



Dex-O-Tex Elastatex 500 is designed for installation by Factory Trained Installers who specialize in the installation of Dex-O-Tex systems. This international group of installers, in conjunction with professional architects and engineers, can assist in ensuring that project specifications reflect the best long-term decking and waterproofing solutions for every application.

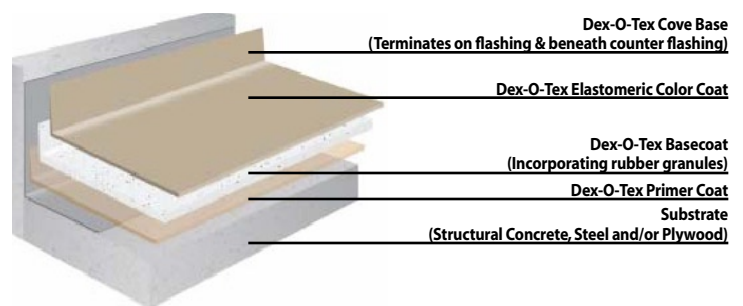

Specifications

Specification assistance is readily available through Crossfield Products Corp. Contact us at **800-823-0225** for immediate assistance.

DEX-O-TEX®

- Floor & Wall Finishes
- Thermal & Moisture Protection
- Concrete Protection & Renewal

TECHNICAL INFORMATION

ELASTATEX 500

Application Instructions

Surface must be clean with thorough removal of laitance, grease, concrete curing agents and foreign matter. Consult Crossfield Products Corp. for instructions on acid etching or shot blasting requirements.

- Apply the epoxy primer by roller.
- Mix and apply the Elastatex basecoat by trowel, then broadcast the rubber granules into the cured basecoat.
- Apply the pigmented topcoat by roller or airless spray.
- Optional oven-dried rounded silica sand can be substituted for rubber granules.

Detailed Installation Guidelines are available. Please contact Crossfield Products Corp. to obtain a copy.

Limited Warranty

NO WARRANTY SHALL BE EFFECTIVE UNTIL THE TERMS AND CONDITIONS OF SALE SET FORTH IN CROSSFIELD PRODUCTS CORP. INVOICE ARE MET.

Crossfield Products Corp. warrants to the purchaser of its products that such products are free from manufacturing defect. Crossfield does not warrant or guarantee the workmanship performed by any person or firm installing its products. Crossfield's obligation under this warranty is limited solely to the original purchaser and solely to the remedy of replacement in kind of any product which Crossfield sold which may prove defective in manufacture within one year from date of installation, provided said product was stored correctly and installed within the product's shelf life, by the original purchaser and which Crossfield examination shall disclose to Crossfield's satisfaction to be thus defective.

IN NO EVENT SHALL CROSSFIELD PRODUCTS CORP. BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES. THIS WARRANTY IS EXPRESSLY GIVEN IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR USE AND ALL OTHER OBLIGATIONS OR LIABILITIES ON CROSSFIELD'S PART, AND WE NEITHER ASSUME NOR AUTHORIZE ANY PERSON OR PERSONS TO ASSUME FOR US ANY OTHER LIABILITY IN CONNECTION WITH THE SALE OF A CROSSFIELD PRODUCT. THIS WARRANTY SHALL NOT APPLY TO ANY OF CROSSFIELD'S PRODUCTS, WHICH HAVE BEEN SUBJECT TO ADULTERATION, ALTERATION, ABUSE OR MISUSE. CROSSFIELD PRODUCTS CORP. MAKES NO WARRANTY WHATSOEVER IN RESPECT TO ACCESSORIES, PARTS OR MATERIALS NOT SUPPLIED BY CROSSFIELD PRODUCTS CORP., WHICH ARE USED IN CONNECTION WITH ITS PRODUCTS. THE TERM "ORIGINAL PURCHASER" IN THIS WARRANTY MEANS THAT PERSON, CORPORATION OR ENTITY TO WHOM CROSSFIELD PRODUCTS CORP. SOLD ITS PRODUCT OR PRODUCTS. ANY ACTION TO ENFORCE ANY WARRANTY OR FOR BREACH OF CONTRACT OR ARISING OUT OF ANY CLAIM AGAINST CROSSFIELD PRODUCTS CORP. SHALL BE COMMENCED AND MAINTAINED ONLY IN A COURT OF COMPETENT JURISDICTION IN THE CONTINENTAL UNITED STATES OF AMERICA. THE PURCHASER ACCEPTS THESE TERMS AND CONDITIONS, AND HEREBY EXPRESSLY WAIVES ANY CLAIM TO ADDITIONAL DAMAGES.

CAUTION: ALWAYS KEEP OUT OF THE REACH OF CHILDREN.



DEX-O-TEX PRODUCT LINE Crossfield Products Corp.

West Coast Office
3000 E. Harcourt Street
Rancho Dominguez, CA
90221
310-886-9100
310-886-9119 fax

East Coast Office
140 Valley Road
Roselle Park, NJ
07204
908-245-2800
908-245-0659 fax

www.dexotex.com