

DEX-O-TEX

Product Description Sheet



Advanced Floor
and Waterproof
Systems since
1938

www.dexotex.com

11/21

Crossfield
Products Corp.

California
3000 E. Harcourt St.
Rancho Dominguez,
90221
(310) 886-9100

Texas
128 Industrial Dr.
Cibolo, 78108
(210) 888-0449

New Jersey
140 Valley Rd.
Roselle Park, 07204
(908) 245-2800

Dex-Flex

Waterproof Deck System
Typical Thickness 1/8" – 1/4"

DESCRIPTION

Dex-Flex waterproof deck system is a solvent-free, fluid applied, elastomeric waterproofing and polyacrylate pedestrian traffic topping system that is ideal for concrete or plywood substrates.

WHERE TO USE

Dex-Flex is ideal for promenade decks, sun decks, patios, roofs, rooftop tennis courts, balconies, and pedestrian traffic surfacing.

ADVANTAGES

- ICC ESR 1714 Approval over Plywood and Concrete Substrates
- Monolithic, including integral flashing
- Resilient and comfortable underfoot
- Reduces sound transmission
- Environmentally safe
- Monolithic, seamless
- Fast cure time and return to service
- Solvent free with minimal odor
- VOC and LEED compliant



FINISH OPTIONS

- See AJ-44 and Colorpax LIP Color Chart available at www.dexotex.com
- Wide array of slip resistant textures, colors, and finishes available

SYSTEM COMPONENTS

Plywood	Product	Thickness
Lath Mortar	Dex-O-Tex Lath Mortar	3/16"
Membrane	Barrier Guard	20 Mils
Membrane w/ Fabric	Barrier Guard w/ RP Fabric	20 Mils
Protection Coats	Resistite	124 Mils
Sealer	AJ-44 XL	16 Mils

Over Concrete	Product	Thickness
Membrane	Barrier Guard	20 Mils
Membrane w/ Fabric	Barrier Guard Membrane w/ RP Fabric	20 Mils
Protection Coats	Resistite	124 Mils
Sealer	AJ-44 XL	16 Mils

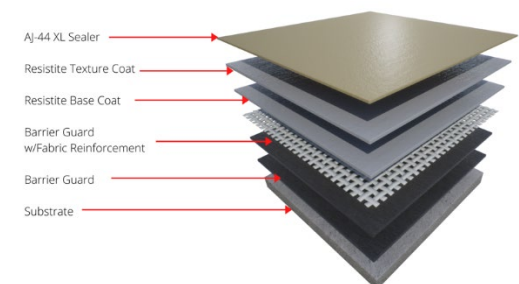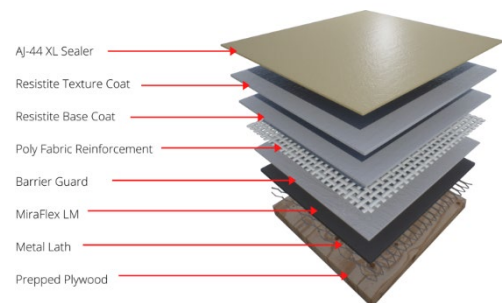

Installed by Factory Trained Dex-O-Tex Applicators Only

PHYSICALS	METHOD	RESULTS
Weight		2.5 lbs per sq ft
Waterproofing	ASTM D751	No passage of water
Weathering	ASTM G23	Pass
Accelerated Aggin	ASTM D756	No chalking, cracking, or delamination
Water Absorption	ASTM D570	6.09%
Fire Safety	Intermittent Flame Exposure Spread of Flame Burning Brand	Class A
Adhesion	ASTM D7234	>400 PSI

The above physical properties were measured in accordance with the referenced standards. Results may vary based upon statistical variations on mixing methods and equipment, application methods, environment, and actual site conditions and curing conditions. All sample preparation and testing are conducted in a laboratory environment and actual performance on job site may vary from these values based on actual site conditions.

CARE AND MAINTENANCE

See care and maintenance form available at www.dexotex.com

CHEMICAL RESISTANCE

See chemical resistance chart available at www.dexotex.com

LIMITATIONS

- Waterproofing may depend upon existing flashing and substrate conditions.
- Not intended for vehicular traffic.
- Limited ability to bridge working cracks in substrate.
- Must terminate at seismic or expansion joints.
- Working substrate, settlement, deflection, and movement of any kind can develop cracking in the surface and underlying membrane and underlayment

NOTE

Crossfield Products Corp. assumes no responsibility or liability for any errors or omissions in the content of this document. The information contained is subject to change without notice.

WARRANTY

All sales are subject to the Crossfield Terms and Conditions effective on the date the purchase order is received. The Terms and Conditions are incorporated herein in full by this reference. The Terms and Conditions are set forth at (www.dexotex.com) and will also be sent by mail or fax to the purchaser upon request. By placing an order, the Buyer acknowledges that it has read and agrees to the provisions of the Terms and Conditions.

Crossfield Products Corp.

California
3000 E. Harcourt St.
Rancho Dominguez,
90221
(310) 886-9100

Texas
128 Industrial Dr.
Cibolo, 78108
(210)888-0449

New Jersey
140 Valley Rd.
Roselle Park, 07204
(908) 245-2800